

SRP LUXURY OUTDOOR COLLECTION

even**TUBE**® | even**GLO**® | the **Habanero**® | e**WAVE**™



SUPERIOR
RADIANT PRODUCTS

WE KEEP YOU OUTDOORS™



THE SLEEKEST INFRARED TUBE HEATER **IN THE INDUSTRY**

MODULATING TWO STAGE HIGH EFFICIENT GAS-FIRED INFRARED HEATER


A modern heating solution built to perform safely and dependably in indoor and outdoor applications.

- Modulating two stage tube heater
- Rates from 40,000 to 100,000 BTU/hr
- Wind resistant up to 12 mph
- Self-diagnostic ignition module
- Effective for ceiling heights 9' to 16'
- Clearance to combustibles as low as 2"
- Up to 50% electrical energy savings with powerful PSC motor
- Approved for indoor and outdoor applications - vented or unvented
- Easy to install, maintenance free heat solution
- Compatible with smart wireless technology

100% Efficient Reflector

Thermal expansion mechanism (Model ETSV)
Patent-pending technology


Aesthetically pleasing design,
includes deco grille for quick installation

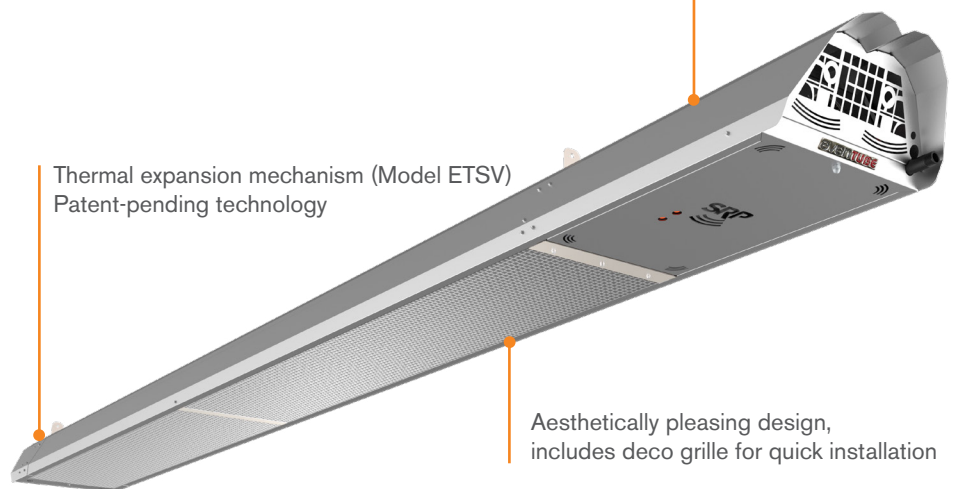

event**TUBE**[®] COLLECTION

MOST EVEN HEAT DISTRIBUTION FOR LARGE SPACES

Ranging from 192ft² to 672ft²

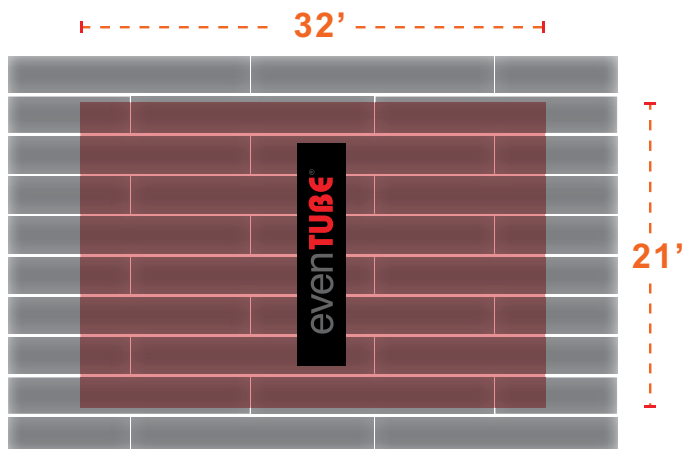

For illustrative purposes only.




CONFIGURATIONS

MODELS	DESCRIPTION	GAS	LENGTH(S)	000'BTU/HR (HIGH/LOW)	CSA APPROVAL	LOWEST TOP CLEARANCE
ETS	SLIM LINE HIGH OUTPUT	NG & LP	9'	*50/30, 40/23	OUTDOOR ONLY	4"
			12'	60/37.5		
			17'	80/49, 100/58		
ETSV	SLIM LINE VENTED	NG or LP	12'	40/23	INDOOR / OUTDOOR	2"
			17'	60/37.5		
			22'	80/49		

Visit www.superiorradiant.com for more information.

* NATURAL GAS ONLY


FINISH OPTIONS



**316 MARINE GRADE
STAINLESS STEEL**



BLACK



MARINE GRADE ALUMINUM

even**TUBE**® COLLECTION



GA201M2
PORTABLE



GA301MP
PORTABLE



GA301(M,U,T)
FIXED



GA301H
HANGING

FINISH OPTIONS



316 MARINE GRADE
STAINLESS STEEL



BLACK




BRONZE

PATENTED DESIGN AND TECHNOLOGY



TOP REFLECTOR

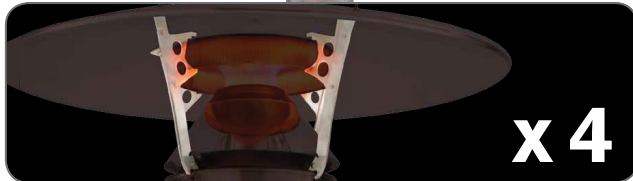


x4

HEAVY-DUTY, 4-ARM SUPPORT SYSTEM




EMITTER

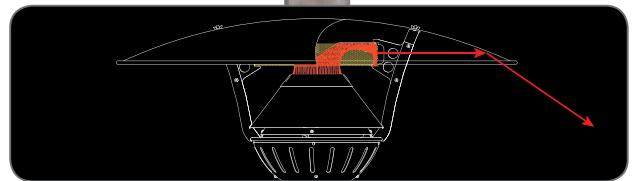

MOST EFFICIENT IN THE INDUSTRY




TORCH FLAME

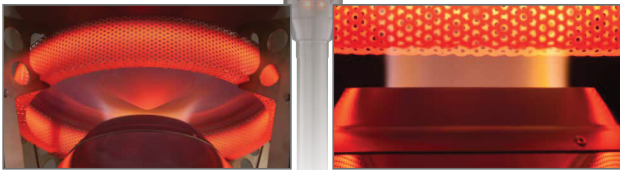

TORCH FLAME IS DISPERSED EVENLY TO INCREASE EFFICIENCY AND CREATE AN UNMATCHED CIRCLE OF EVEN HEAT




BOTTOM REFLECTOR

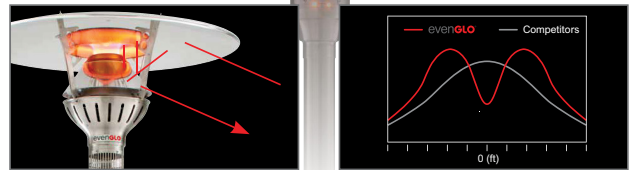

THE BOTTOM REFLECTOR RE-DIRECTS ANY INFRARED RAYS HEADING STRAIGHT DOWN, OUTWARD TOWARD PATRONS WITHIN 12 FEET

58% MORE HEAT COVERAGE

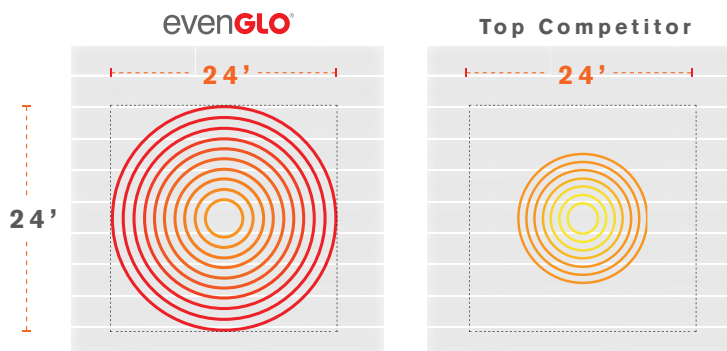

Typical coverage of one heater
For illustrative purposes only

evenGLO® COLLECTION



the **Habanero**® HIGH INTENSITY HEATER



HAB-M20 Stainless
15,000 (LO) - 20,000 (HI)



HAB-M40 & HAB-50 Stainless
32,000 (LO) - 40,000 (HI)
42,000 (LO) - 50,000 (HI)



HAB-M20 Black
15,000 (LO) - 20,000 (HI)



HAB-M40 & HAB-50 Black
32,000 (LO) - 40,000 (HI)
42,000 (LO) - 50,000 (HI)



the **Habanero**® COLLECTION

MOST INTENSE HEAT COVERAGE AVAILABLE

AVAILABLE IN 33" & 48" LENGTHS | AS LOW AS 3" TOP CLEARANCE | NO BLOWER = NO NOISE



124% MORE HEAT COVERAGE

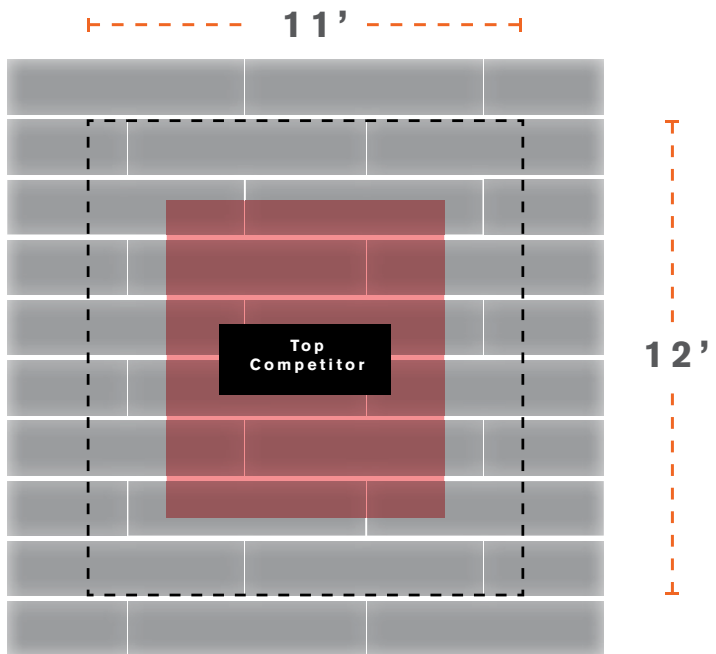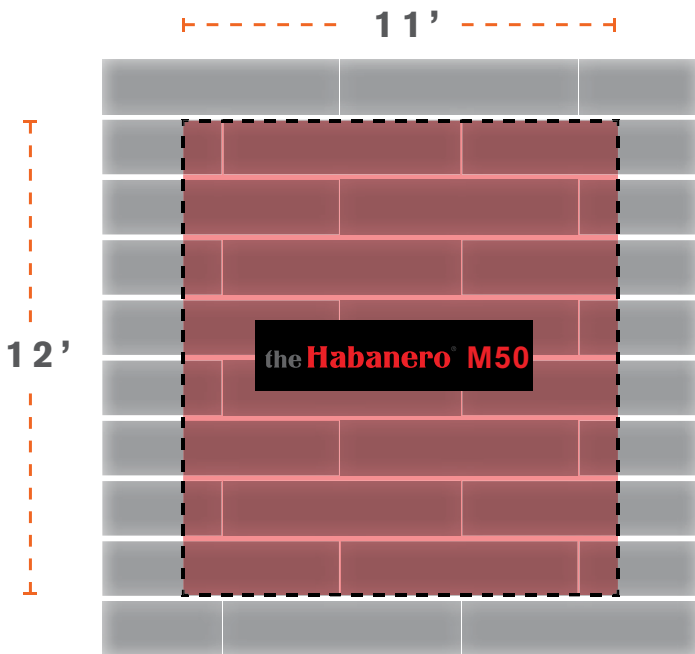

For illustrative purposes only




the **Habanero**® COLLECTION



SRP **eWAVE™** ELECTRIC INFRARED HEATER

MOST EVEN HEAT PATTERN IP55 RATED - APPROVED FOR OUTDOOR USE

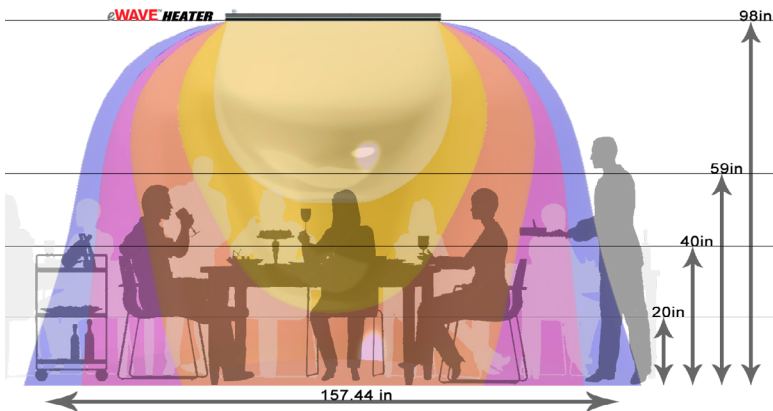

- Modern European design
- High efficiency - even heat pattern
- Corrosion resistant
- Built-in waterproof junction box
- Long & medium energy absorption
- Premium warranty with complete replacement
- Made from 100% recyclable material
- Flexible mounting adjustment from 10 to 50 degree
- Engineered brackets included for easy installation and maintenance
- Compatible with smart technology

eWAVE™ COLLECTION

CONFIGURATIONS

LONG WAVE MODELS

Part #	Length (inches)	Output Wattage	Supply Phase	Amp Draw	Supply Voltage
EW15L12	57	1500W	1	12.5 A	120V
EW32L24	89	3200W	1	13.3 A	240V
EW30L20Y	73	3000W	3	8.3 A x 3	208V
EW30L24D	73	3000W	3	7.2 A x 3	240V
EW45L24D	96	4500W	3	10.8 A x 3	240V
EW45L48Y	96	4500W	3	5.4 A x 3	480V
EW45L48D	96	4500W	3	5.4 A x 3	480V
EW45L60Y	96	4500W	3	4.3 A x 3	600V
EW45L60D	96	4500W	3	4.3 A x 3	600V



Please note: The majority of residential houses use a single phase supply



MEDIUM WAVE MODELS

Part #	Length (inches)	Output Wattage	Supply Phase	Amp Draw	Supply Voltage
EW18M12	41	1800W	1	15 A	120V
EW18M12V	43	1800W	1	15 A	120V
EW18M24	41	1800W	1	7.5 A	240V
EW18M24V	43	1800W	1	7.5 A	240V



Suffix **V** for factory installed remote control option

Please note: The majority of residential houses use a single phase supply



Please visit our website www.superiorradiant.com for more information or contact our closest rep in your area.







HEAT • STYLE • LUXURY

WE KEEP YOU OUTDOORS™

THE SRP ADVANTAGE

INDUSTRY LEADING QUALITY
AND CUSTOMER SERVICE

WIDEST SELECTION OF LUXURY
OUTDOOR GAS HEATERS

CUSTOM LAYOUTS, PRODUCT
FEATURES AND FINISHES

Visit our website for I/O manuals, specifications, and submittal data.



SUPERIOR
RADIANT PRODUCTS



Superior Radiant Products Ltd.
563 Barton Street
Stoney Creek, ON L8E 5S1 Canada

Superior Radiant Products Inc.
315 N Madison Street
Fortville, IN 46040 USA

1 800 527 HEAT(4328) | tel 1 905 664 8274 | fax 1 905 664 8846
sales@superiorradiant.com | www.superiorradiant.com

WE KEEP YOU OUTDOORS™

DISTRIBUTOR